


What you will need

- Old credit card
- Damp cloth
- Black rubber sealant

You will need to garage the vehicle for 24 to 48 hours with the top down and both doors open while sealant dries (about 24 hours)

(Fig1)

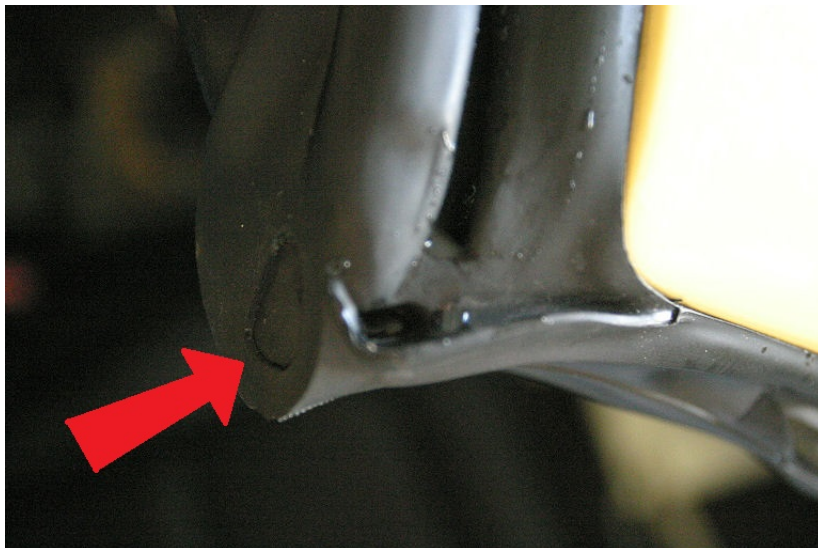

If you look around the plug you will see gaps, this is where the water is coming in (Fig1).


Take the tube of rubber sealant and run the nozzle between the plug and wall so that you deposit sealant between the wall and the plug.

(Fig2)



When you are finished sealing the plug it should look something like this (Fig2)

(Fig3)

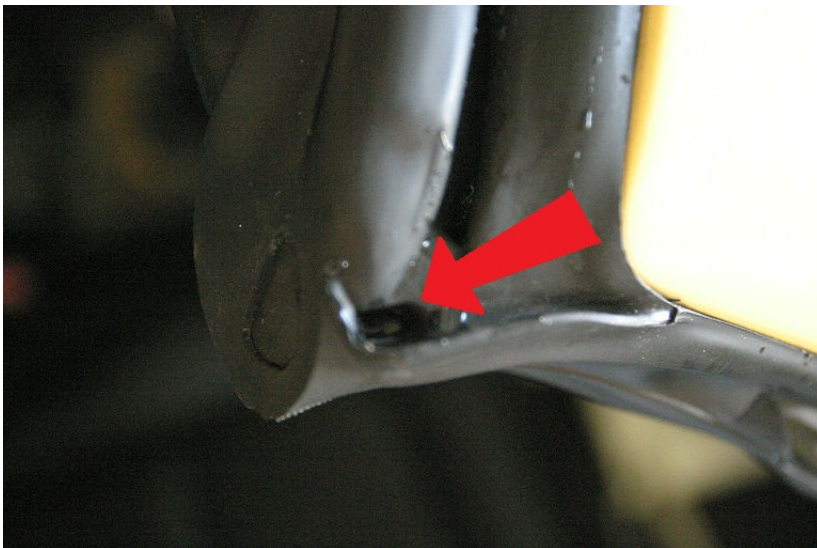

Be mindful not to get sealant in the drainage hole (Fig3)

(Fig4)



Now put a bead of sealant on top of the plug (Fig4).

(Fig5)



Now using the credit card smooth it out so it's a level smooth surface (Fig5)

Take your damp cloth and clean up any mess. Leave the vehicle garaged with the top down and the doors open until the sealant sets. The doors need to be left open so that no pressure is placed against the plugs while the sealant sets.